









Dive into your next dimension


TESSERACT

TESSERACT X 50
Instructions manual

A Package details


 Motherboard screw	 The power screw	 HDD screw
 Copper pillar	 Copper pillar (long)	 Cable Tie

B Schematic diagram of wire interface

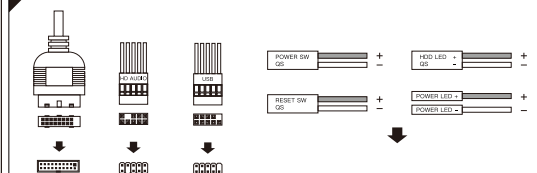


Please refer to the manual that came with your motherboard for any specific connection instructions

C Product size

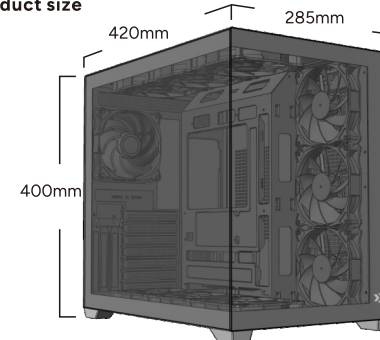


D

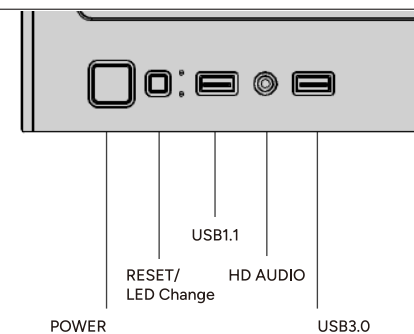


IO panel


E Machine overview

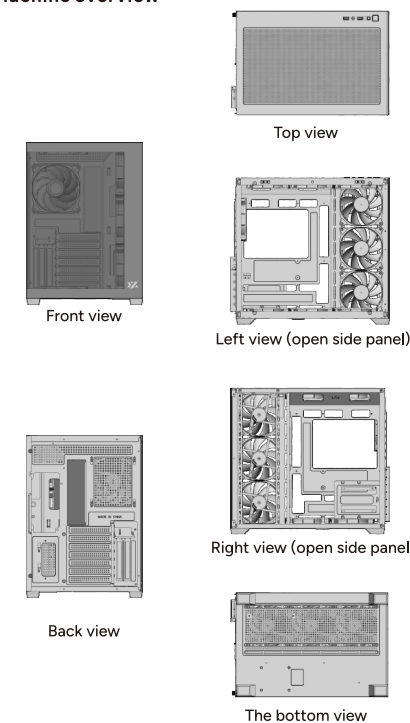

F Chassis disassembly diagram

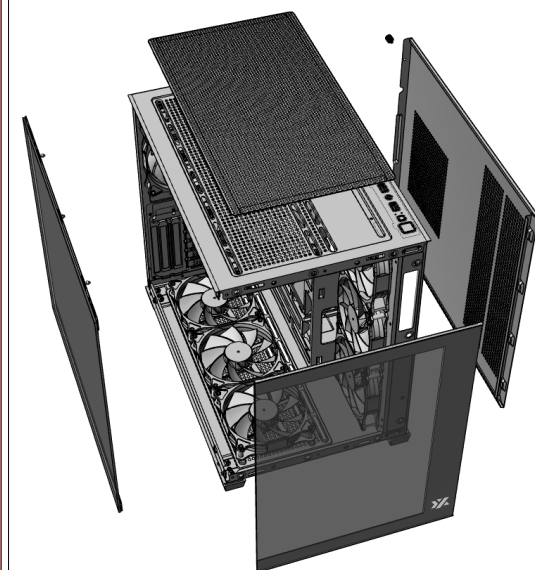


G Remove and install side panels

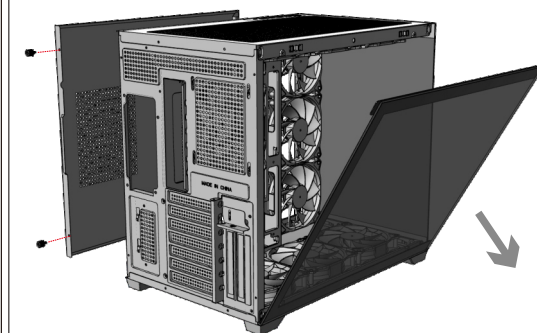


The side glass panel opens using clips (without screws). To remove the iron side plate, unscrew the two screws at the rear.

H The power supply installation

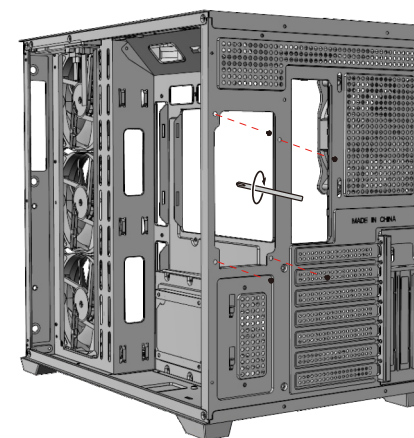


The power supply can be fixed by aligning the screw in the figure to the hole position
Note: different types of power supply, hole location may be slightly different, take the actual object as the standard

I Motherboard installation

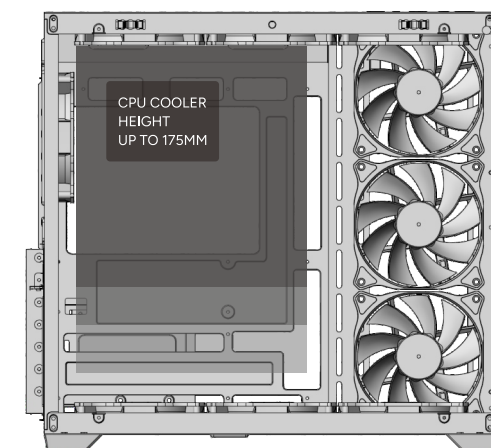


According to the motherboard type (ATX/M-ATX/ITX), the copper pillars may need to be re-arranged manually according to the fixing locations specific to your motherboard
CPU Height limit: 175mm

J The graphics card installation

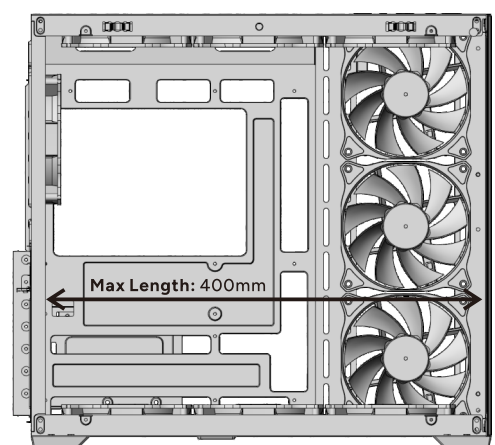


Max Length: 400mm

K Panel

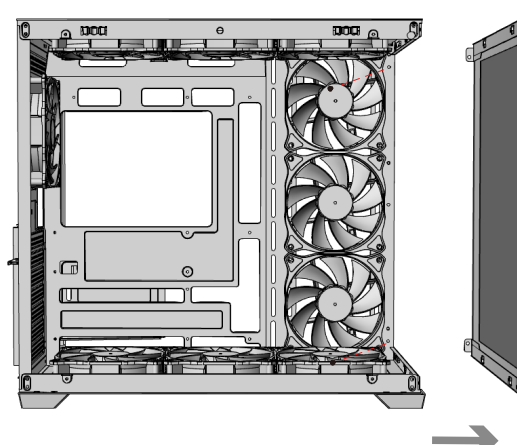

Installation: Fit the panel to the front panel and fix it with screws from the inside of the chassis
Removal: Unscrew the screws from the inside of the chassis and remove the panel


L Fan installation

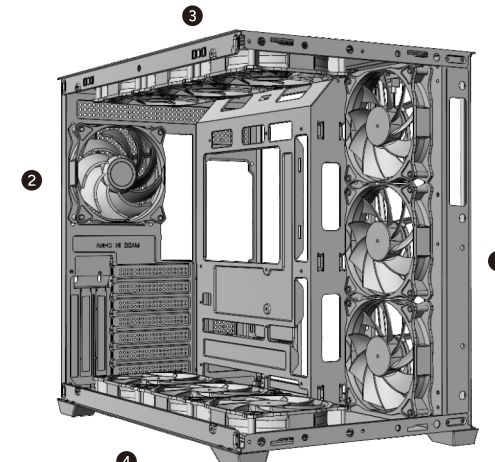

Fan compatibility

- ① MB tray: 3 x 120/2 x 140mm
- ② Rear: 1 x 120mm
- ③ Top: 3 x 120/2 x 140mm
- ④ Bottom: 3 x 120/2 x 140mm


M Water cooling installation

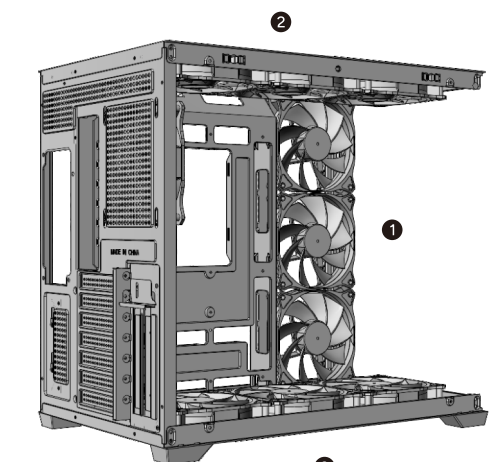

Radiator Support

- ① MB tray: 240/280mm
- ② Top: 240/280/360mm
- ③ Bottom: 240/280/360mm


N SSD installation

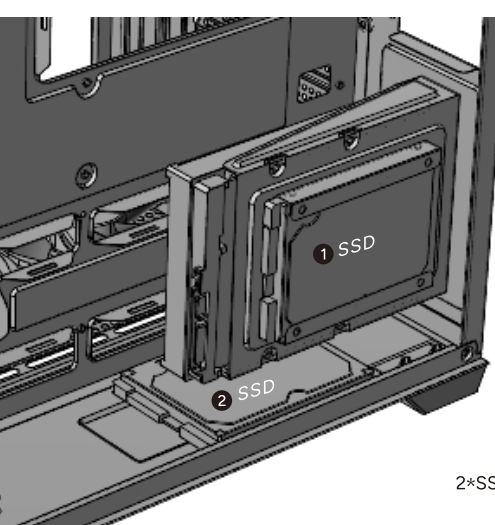

2*SSD

Align the SSD holes and fix them with screws.


O HDD installation

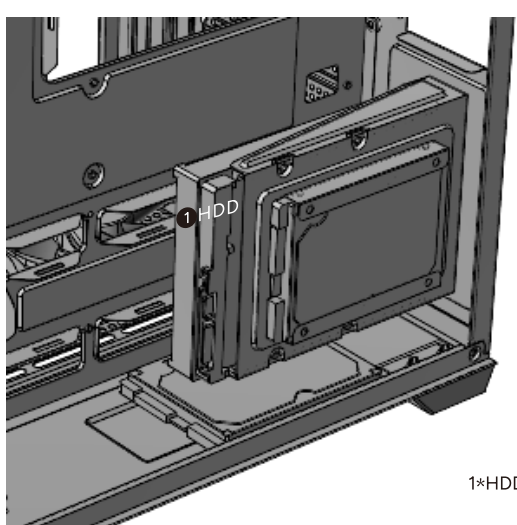

1*HDD

Align the hard disk holes and fix them with HDD screws.

P Fan interface

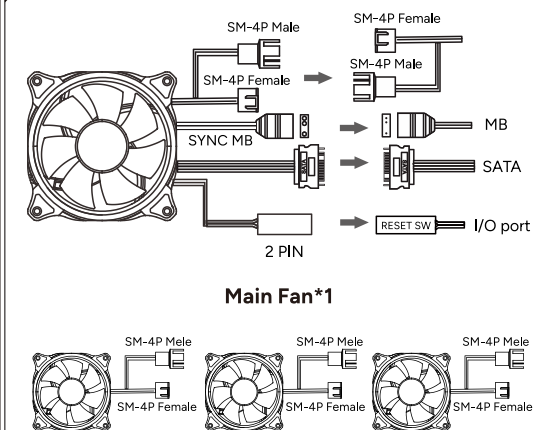



Main Fan*1

Auxiliary Fans*3

The auxiliary fan is connected in series and finally connected to the male head of the main fan.

*** Change LED lights via Reset button from Case and Motherboard**

Find out more about us at www.xyzpcgear.com